



PACKAGE HIGHLIGHTS

- Priced to excite
- Designed for fun
- Easy to ride
- 100,000 ways to make it your own

SHOWN WITH INTENSE BLACK PANELS



	Rotax® 600 ACE™	Rotax® 900 ACE™
ENGINE		
Type	Rotax® 600 ACE™ in-line 2 cylinders, liquid-cooled with electronic fuel injection and electronic throttle control	Rotax® 900 ACE™ in-line 3 cylinders, liquid-cooled with electronic fuel injection and electronic throttle control
Bore & Stroke	2.9 x 2.7 in. (74 x 69.7 mm)	2.9 x 2.7 in. (74 x 69.7 mm)
Power	50 hp (37.3 kW) @ 7,300 RPM	82 hp (61.1 kW) @ 8,000 RPM
Torque	36.7 ft-lb (49.7 Nm) @ 6,000 RPM	58.3 ft-lb (79.1 Nm) @ 6,500 RPM

TRANSMISSION

Type	Automatic (CVT) with reverse function
------	---------------------------------------

CHASSIS

Front Suspension	Double wishbone
Front Shock Type/Travel	SACHS† twin-tube coil-over shocks / 5.35 in. (136 mm)
Rear Suspension	Multi-link – mono swing arm
Rear Shock Type/Travel	SACHS twin-tube coil-over shocks with preload adjustment / 5.71 in. (145 mm)
Electronic Brake Distribution System	Foot-operated, hydraulic 3-wheel brake
Front Brakes	270 mm discs with Nissin 2-piston floating calipers
Rear Brake	220 mm disc, 1-piston floating caliper
Parking Brake	Park lock
Front Tires	MC 145/60R16 66T
Rear Tire	MC 205/45R16 77T
Aluminum Front Rims	10-spoke, Platinum Silver, 16 x 4.5 in. (406 x 114 mm)
Aluminum Rear Rim	10-spoke, Platinum Silver, 16 x 6.5 in. (406 x 165 mm)

CAPACITY

Rider Capacity	1
Maximum Vehicle Load	449.7 lb (204 kg)
Storage Capacity	1.85 gal (7 L)
Fuel Capacity	5.28 gal (20 L)
Fuel Type	Premium unleaded

	Rotax® 600 ACE™	Rotax® 900 ACE™
DIMENSIONS		
L x W x H	92.6 x 59.9 x 41.9 in. (2,352 x 1,522 x 1,063 mm)	92.6 x 59.9 x 41.7 in. (2,352 x 1,522 x 1,060 mm)
Wheelbase	67.3 in. (1,709 mm)	
Seat Height	23.6 in. (599 mm)	23.5 in. (597 mm)
Ground Clearance	3.8 in. (97 mm)	
Dry Weight	594 lb (270 kg)	616 lb (280 kg)

INSTRUMENTATION

Type	4.5 in. (11.4 cm) digital display	
Main Functions	Speedometer, tachometer, odometer, trips, distance to empty, engine lights, fuel gauge, clock	Speedometer, tachometer, odometer, trips, distance to empty, engine lights, fuel gauge, clock, ECO mode and Sport mode

SAFETY & SECURITY

SCS	Stability Control System
TCS	Traction Control System
ABS	Anti-Lock Braking System
Anti-theft System	Digitally Encoded Security System (D.E.S.S.™)
HHC	Hill Hold Control

COVERAGE

Factory Warranty	1-year BRP limited warranty with 1-year roadside assistance
Extended Service Terms	B.E.S.T. terms available from 12 to 36 months with roadside assistance

FEATURES

2 halogen headlamps (55 W), front fenders with integrated LED lights, dual USB port, glove box, adaptive foam waterproof seat

CLASSIC SERIES¹



Intense Black Adrenaline Red Yellow Shock

EPIC SERIES



Carbon Black Immortal White Liquid Steel

EXCLUSIVE SERIES²




Pink Punk Liquid Gold Heritage Yellow Galactic Blue Acid Yellow
 Sandstorm Mint Freeze Ghost Black Pink Bloom
 Pinky Pineapple Nitro Blue Heritage White IV Sonic Silver

NEW PANELS




Lemon Twist Icepop Blue Gold Rush Silver Lava

FEATURE HIGHLIGHTS

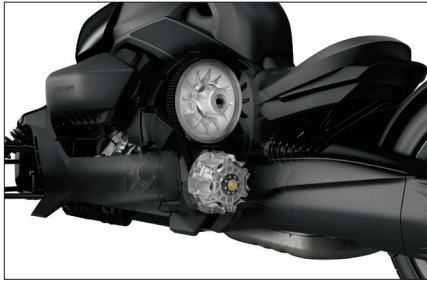

AUTOMATIC TRANSMISSION (CVT)

No need to worry about changing gears as your continuously variable transmission will find the perfect combination of performance and fuel efficiency for you.

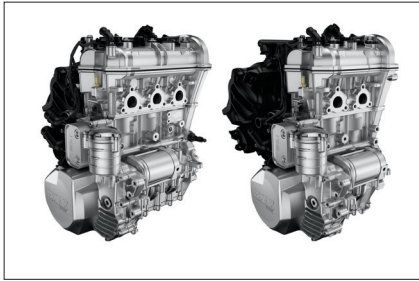

ENGINE OPTIONS

The 2-cylinder Rotax 600 ACE is the ultimate in accessible performance, while the 3-cylinder Rotax 900 ACE is the power and excitement standard of choice!



DRIVESHAFT

Highly durable and robust driveshaft technology will help you enjoy a smooth ride all along the way. No need for further adjustment, alignment or maintenance.



UFIT

Can be adjusted tool-free to fit the rider and provide a personalized and comfortable riding experience.



VSS

The Vehicle Stability System uses a variety of technologies, including SCS/ABS/TCS, to monitor the vehicle and keep the rider confident on the road.



CUSTOMIZATION

The Can-Am Ryker was engineered to be almost infinitely customizable with 1- or 2-up options! Mere moments are all it takes to give it a transformation.